




## NTN BEARING-BOWER CORP.

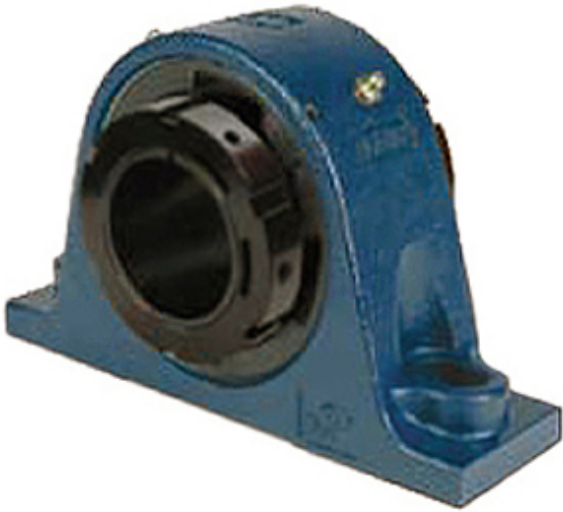

2.188 Inch | 55.575 Millimeter x 3.15 Inch | 80 Millimeter x 2.75 Inch | 69.85 Millimeter QM INDUSTRIES QVSN12V203SEN Pillow Block Bearings

Bearing No. QVSN12V203SEN

QVSN12V203SEN Bearing 2D drawings and 3D CAD models

|                           |  |
|---------------------------|--|
| Category                  | Pillow Block Bearings  |
| Inventory                 | 0.0  |
| Manufacturer Name         | TIMKEN   |
| Minimum Buy Quantity      | N/A  |
| Weight                    | 11.804   |
| EAN                       | 0883450098441  |
| Product Group             | M06288   |
| Number of Mounting Holes  | 2  |
| Mounting Method           | V Lock   |
| Housing Style             | 2 Bolt Pillow Block  |
| Rolling Element           | Spherical Roller Bearing   |
| Housing Material          | Cast Steel   |
| Expansion / Non-expansion | Expansion  |
| Mounting Bolts            | 16 Millimeter  |
| Relubricatable            | Yes  |
| Insert Part Number        | 22212  |
| Seals                     | Triple Lip Viton   |
| Housing Configuration     | 1 Piece Solid  |
| Inch - Metric             | Inch   |
| Other Features            | Double Row   Single Nut   SN Style   |
| Long Description          | 2 Bolt Pillow Block; 2-3/16" Bore; 2-3/4" Base to Center Height; V Lock Mount; Spherical Roller Bearing; |



## NTN BEARING-BOWER CORP.

|                               |   |
|-------------------------------|---|
|                               | 7.205" Minimum Bolt Spacing; 8.504" Bolt Spacing Maximum; Relubricatable; C |
| Category                      | Pillow Block  |
| UNSPSC                        | 31171511  |
| Harmonized Tariff Code        | 8483.20.40.80   |
| Noun                          | Bearing   |
| Keyword String                | Pillow Block  |
| Manufacturer URL              | <a href="http://www.qmbearings.com">http://www.qmbearings.com</a>           |
| Weight / LBS                  | 26  |
| Actual Bolt Center to Center  | 0 Inch   0Millimeter  |
| Nominal Bolt Center to Center | 7.9 Inch   199.5 Millimeter   |
| d                             | 2.188 Inch   55.575 Millimeter  |
| B                             | 2.75 Inch   69.85 Millimeter  |
| Bolt Spacing Minimum          | 7.205 Inch   183Millimeter  |
| D                             | 3.15 Inch   80 Millimeter   |
| Bolt Spacing Maximum          | 8.504 Inch   216Millimeter  |